

NDP-80 Specifications

Port Dimensions (215 GPM Max.)

Intake & discharge connection:

Polypropylene (PPG)	3" ANSI B16.5 #150
Aluminum (ADC-12)	3" ANSI B16.5 #150 (with tapped 3" Female NPT)
Stainless Steel (316)	3" ANSI B16.5 #150 or 3" Female NPT
Cast Iron	3" Female NPT
Air inlet (incl. ball valve):	3/4" Female NPT
Air exhaust (incl. silencer):	1" Female NPT

Maximum Liquid Temperature*

Diaphragm Material	Temperature
Buna N	180°F (82°C)
Neoprene	180°F (82°C)
Santoprene® (TPO)	180°F (82°C)
EPDM	212°F (100°C)
PTFE	212°F (100°C)
Hytrel® (TPEE)	248°F (120°C)
Viton® fluoroelastomer	248°F (120°C)

*The maximum liquid temperature for metal pumps is determined by the elastomer (diaphragm material). Polypropylene pumps have a maximum liquid temperature of 180°F (82°C) regardless of diaphragm material.

Air Supply Pressure (All Models)

20–100 PSI (1.4–7 kfg/cm)

Discharge Volume Per Cycle

Rubber diaphragm: 2.26 gallons (8.57 liters)

PTFE diaphragm: 1.0 gallons (3.8 liters)

Maximum Cycles Per Minute

Rubber diaphragm: 95

PTFE diaphragm: 160

Maximum Size Solid

13/32" (10 mm)

Maximum Dry Suction Lift

Rubber-fitted pump capability: 19-feet



Air Motor

Aluminum Air Motor–Standard

Optional coating: PTFE grey coated (XP)

Notes: Hytrel® fitted pumps include Buna?N wetted o-rings. Santoprene® fitted pumps include EPDM wetted o-rings.

AutoCAD® drawings are available on CDROM or at yamadapump.com

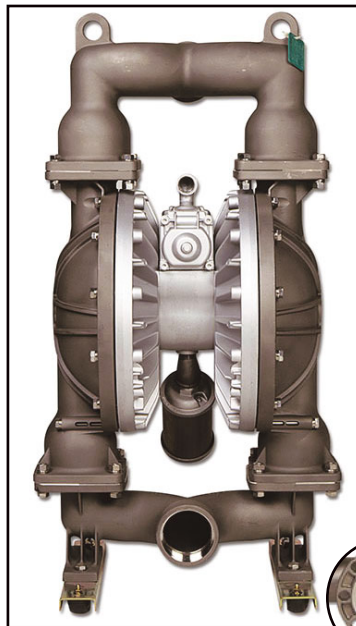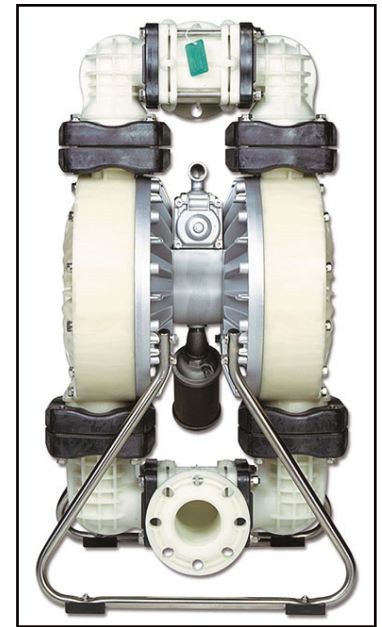

Aluminum (top left)

Dimensions: 20.43" W × 40.75" H

Net Wt.: 151 lbs. (68.5 kg)

Shipping Wt.: 165 lbs.

Polypropylene (top right)

Dimensions: 22.83" W × 41.10" H

Net Wt.: 162 lbs. (73.5 kg)

Shipping Wt.: 177 lbs.

Cast Iron or Stainless Steel (left)

Dimensions: 20.54" W × 38.74" H

Net Wt.: Cast Iron – 271 lbs. (122.9 kg)


SS – 244 lbs. (110.7 kg)

Shipping Wt.: Cast Iron – 277 lbs.

SS – 263 lbs.

Note: ANSI Flange available for Stainless Steel


Model Number Nomenclature

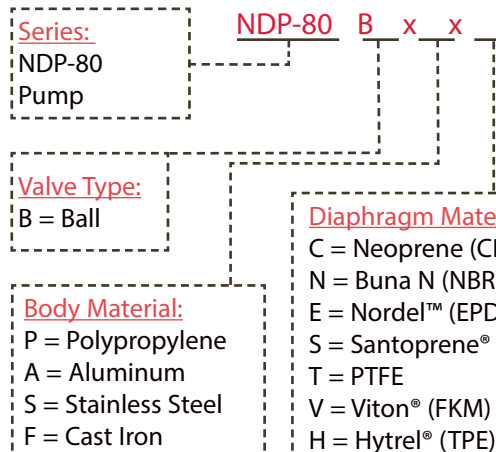

Note: For NPT-fitted Stainless Steel, add "NPT" at end of model number nomenclature.

NDP-80 Performance Curve – Rubber


Rubber Diaphragm Performance Curve

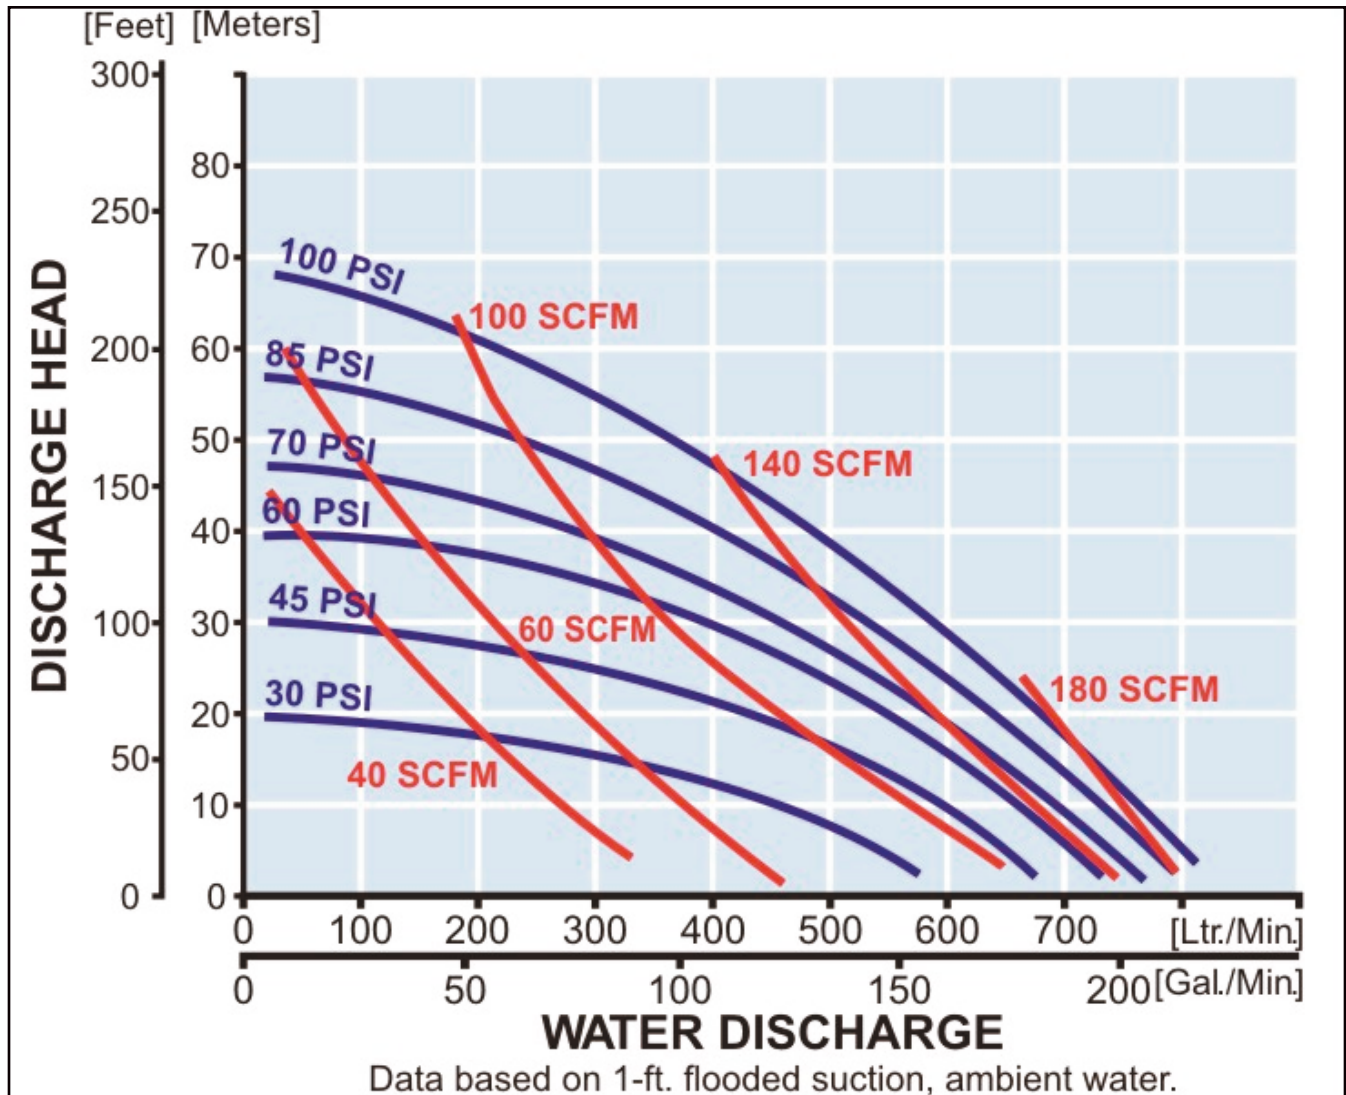


To calculate performance for Santoprene® and Hytrel®-fitted pumps, use Rubber Diaphragm Curve.

NDP-80 Performance Curve – PTFE

PTFE Diaphragm Performance Curve

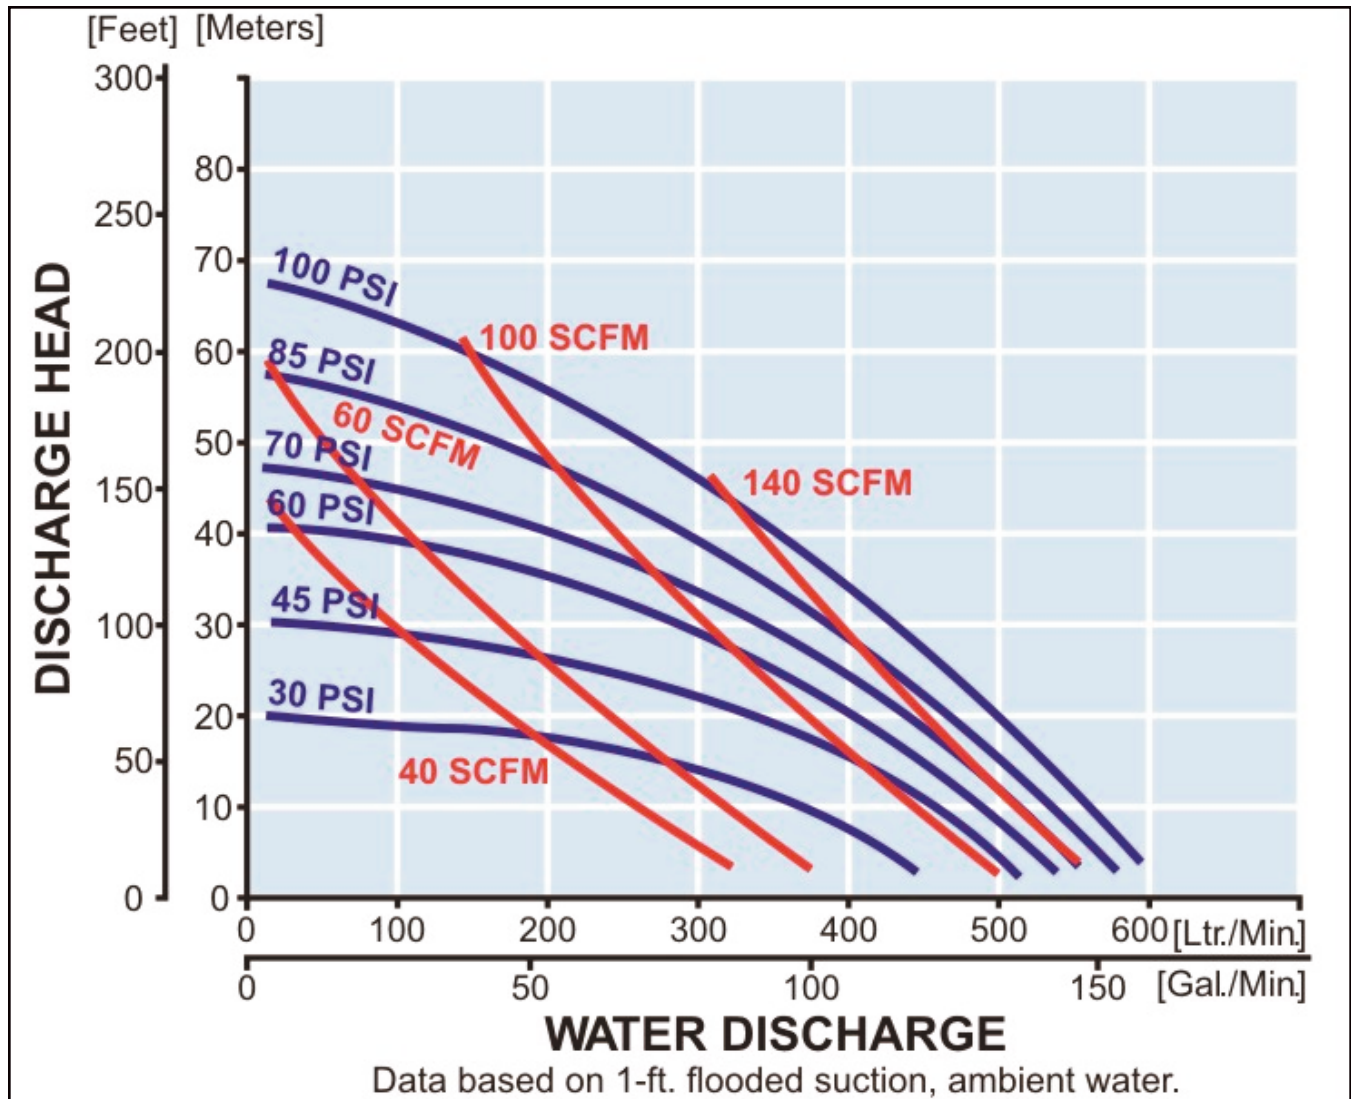

To calculate performance for Santoprene® and Hytrel®-fitted pumps, use Rubber Diaphragm Curve.

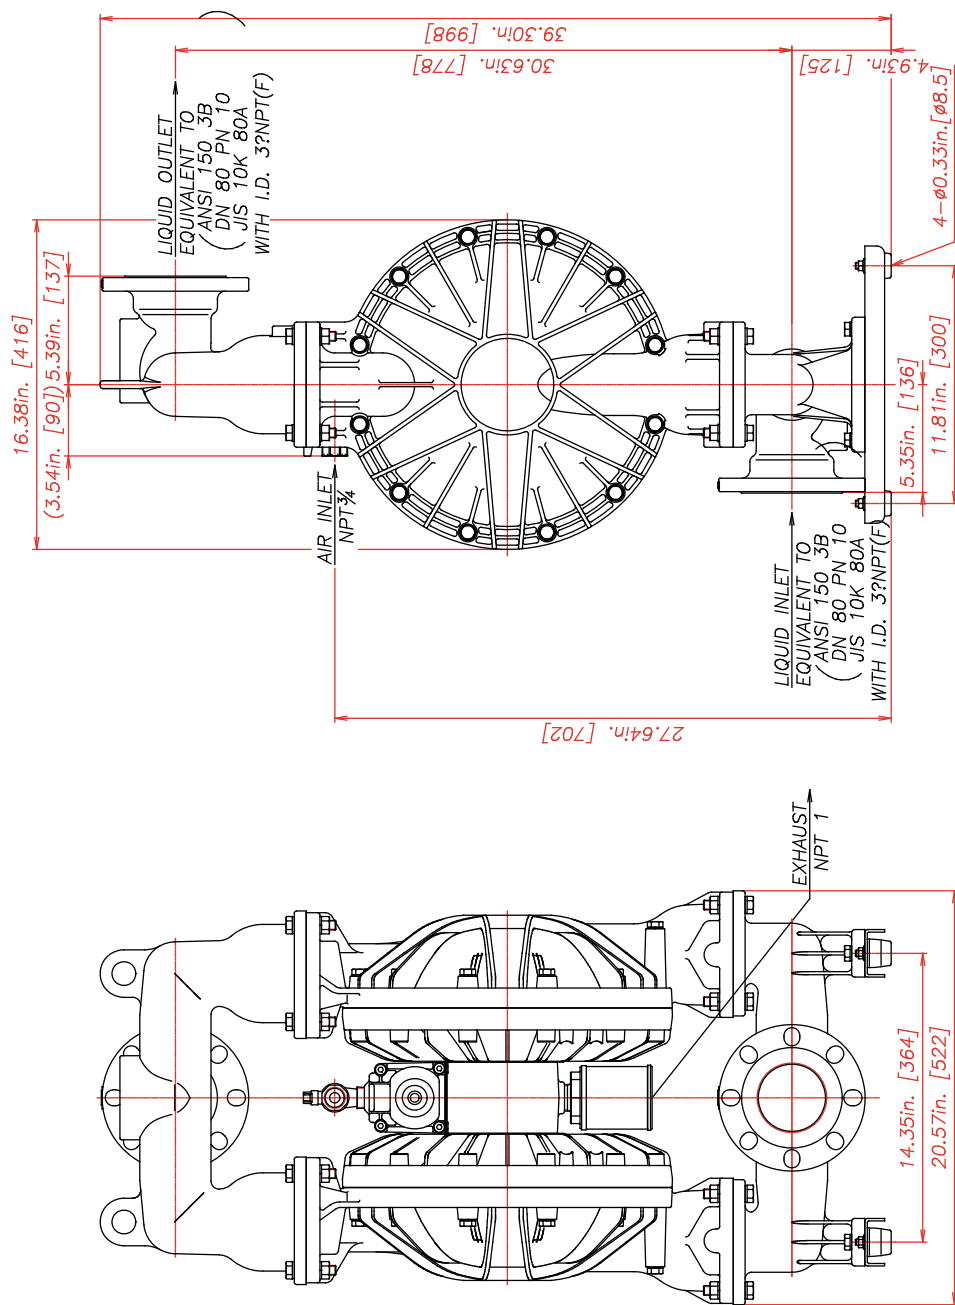

REV	DATE	DESCRIPTION	APPR'D
-----	------	-------------	--------

THE DWG.OF:

DIAPHRAGM PUMP ASSEMBLY

YAMADA AMERICA, INC.
 955 EAST ALGONQUIN ROAD, ARLINGTON HEIGHTS, ILLINOIS 60005
 TOLL FREE 800-990-7867 OR 847-631-9200

SCALE 1 : 1

DRAWN BY YJI

DATE 01/09/12

APPROVED BY S.K.

THIRD ANG. PROJ.


DRAWING NUMBER:

NDP-80BA

REV

1

THIS IS A CAD DRAWING AND MUST NOT BE ALTERED MANUALLY.

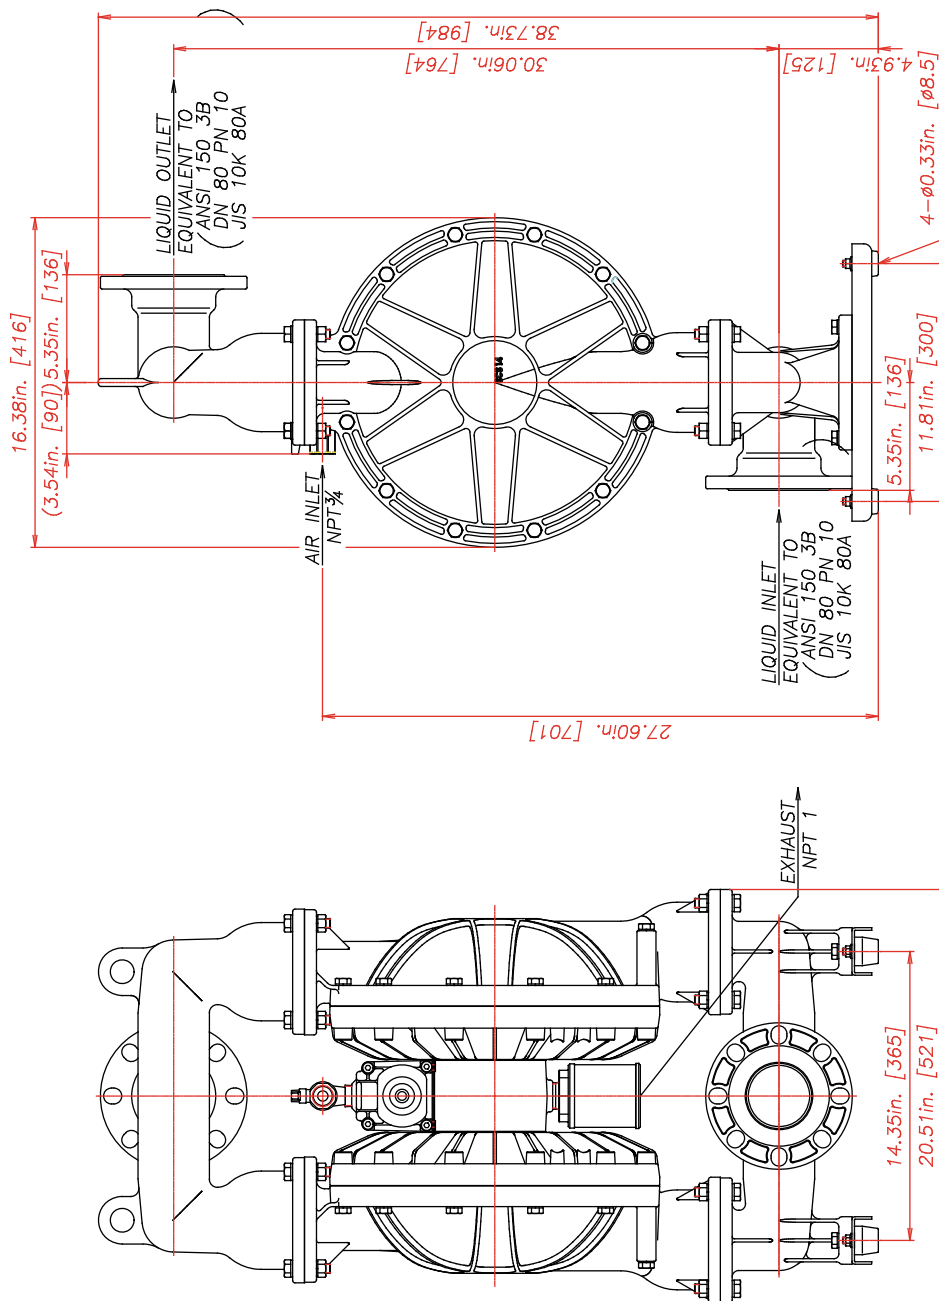

REV	DATE	DESCRIPTION	APPR'D
-----	------	-------------	--------

THE DWG.OF:

DIAPHRAGM PUMP ASSEMBLY

YAMADA AMERICA, INC.
 955 EAST ALGONQUIN ROAD, ARLINGTON HEIGHTS, ILLINOIS 60005
 TOLL FREE 800-990-7867 OR 847-631-9200

SCALE 1 : 1
 DATE 01/09/12
 DRAWN BY YJI
 APPROVED BY S.K.

REV	ANG/PROJ.	DRAWING NUMBER:
1		NDP-80BS FLANGE

THIS IS A CAD DRAWING AND MUST NOT BE ALTERED MANUALLY.

AutoCAD® is a registered trademark of Autodesk, Inc.

Hytrel® is a registered trademark of E.I. du Pont de Nemours and Company.

Kynar® is a registered trademark of Arkema.

Nordel™ is a trademark of DuPont Dow Elastomers.

Ryton® is a registered trademark of Chevron Phillips Chemical Company.

Santoprene® is a registered trademark of Advanced Elastomer Systems.

Swagelok® & VCR® are trademarks of the Swagelok Companies.

Viton® is a registered trademark of DuPont Performance Elastomers.

Due to Yamada's continued commitment to product improvement, specifications may change without notice.