


FGB Oiles 500F Guide Bushings




Specify Part No. by required I.D., O.D. and Length.
 (e.g.) I.D. is 60mm, O.D. is 80mm, and length is 90mm.

FGB - 608090 Parts No.

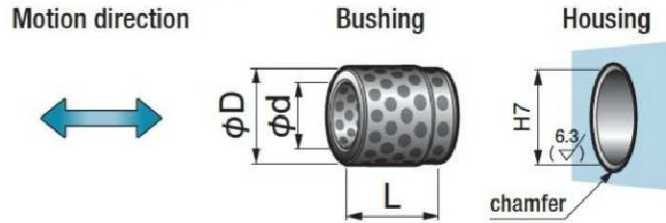

- Applicable to reciprocating motion.
- It is recommended to use a set screw to prevent dislocation.

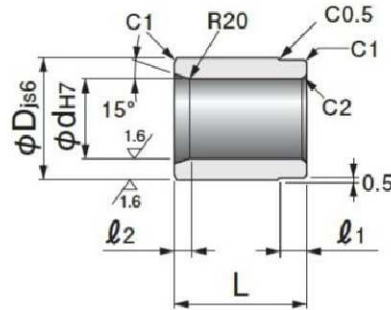

Parts No.	I.D.		O.D.		Length		l ₁	l ₂
	φd	Tolerance	φD	Tolerance	L	Tolerance		
FGB-254040	25	+0.021 0	40	±0.008	40	0 -0.2	10	5
FGB-305050	30	+0.021 0	50	±0.008	50	0 -0.2	10	5
FGB-356055	35	+0.025 0	60	±0.0095	55	0 -0.2	15	5
FGB-406055	40	+0.025 0	60	±0.0095	55	0 -0.2	15	5
FGB-406060	40	+0.025 0	60	±0.0095	60	0 -0.2	10	5
FGB-507075	50	+0.025 0	70	±0.0095	75	0 -0.2	15	10
FGB-608090	60	+0.030 0	80	±0.0095	90	0 -0.2	20	10
FGB-80100120	80	+0.030 0	100	±0.011	120	0 -0.2	25	10
FGB-100120150	100	+0.035 0	120	±0.011	150	0 -0.2	25	10
FGB-120140180	120	+0.035 0	140	±0.0125	180	0 -0.2	25	10

▲ The dimensional tolerances are the values measured at +25°C.